

36m Fire Hose Reel




FEATURES

One-year warranty from date of delivery
Economically priced
Simple operation and maintenance
Meets or exceeds requirements of Australian standard AS1221

ORDERING INFORMATION



For the protection assistance, see your nearest authorised Isupply (Australia) Pty Ltd distributor or sales representative

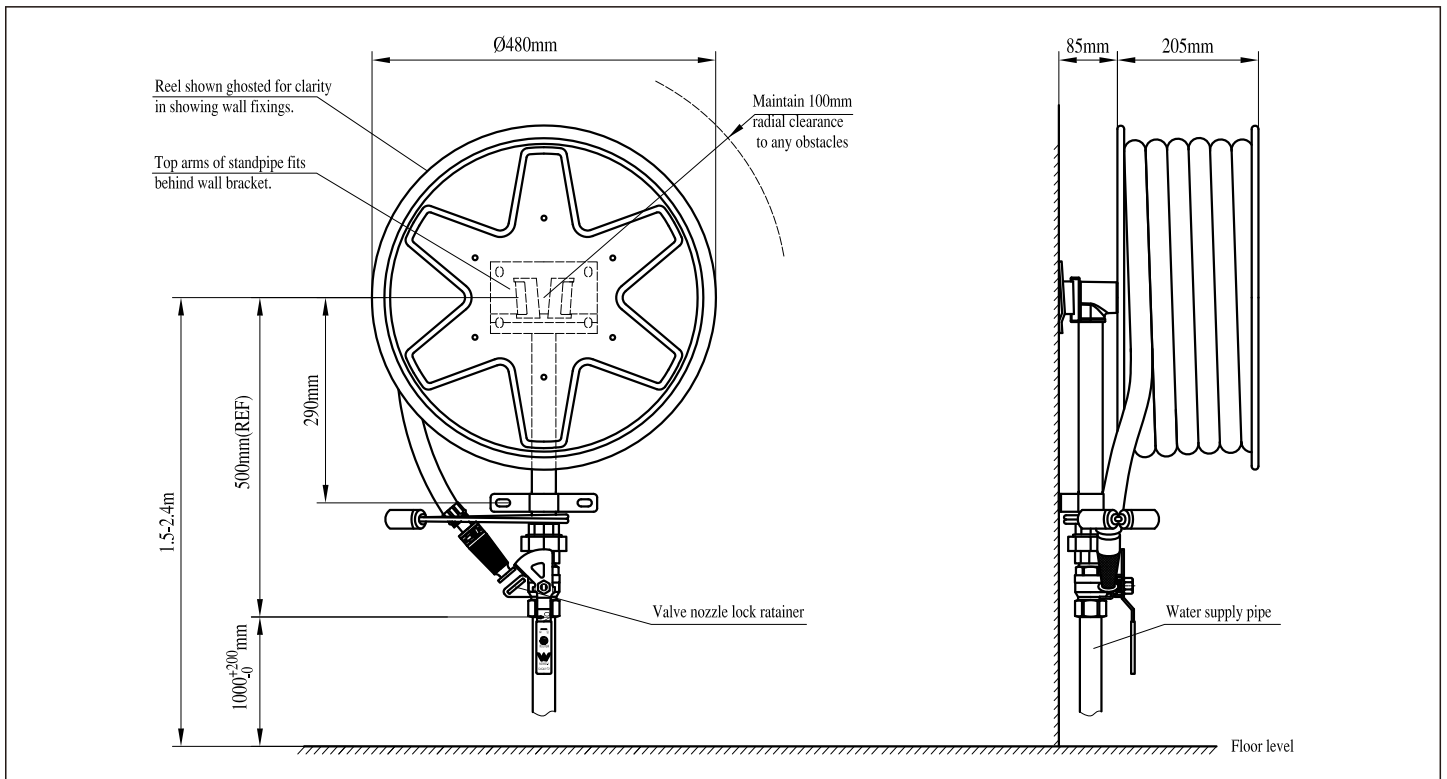

Item	Description	Item	Description
Model Number	HS3626-480	Support Assembly	Mild Steel, Galvinised
Part Number	RH301914H	Hoseguide Assembly	Mild Steel, Zinc Plated
Standard HoseLength&Dia	36 meters X19mm Dia	Union	Malleable Iron, Galvanised
Approvals	AS/NZS 1221	Ball Valve Assembly	Brass / Mild Steel Handles
Minimum Inlet Pressure	220kPa	Nozzle Assembly	Brass
Maximum Working Pressure	1.0MPa	Drum	Polypropylene Copolymer
Side Plates	Steel Sheet Shoving Enamel Red	Hose Spring	Galvanised Spring Steel
Gland	Acetal Copolymer	Tailpiece	Acetal Copolymer
Spindle	Mild Steel	Circlip	Stainless Steel
Bearing	Acetal Copolymer	Inlet Plvot Pipe	Galvanised Mild Steel Pipe
Elbow	Aluminum alloy	Wall bracket	Mild Steel

36m Fire Hose Reel

Component Details

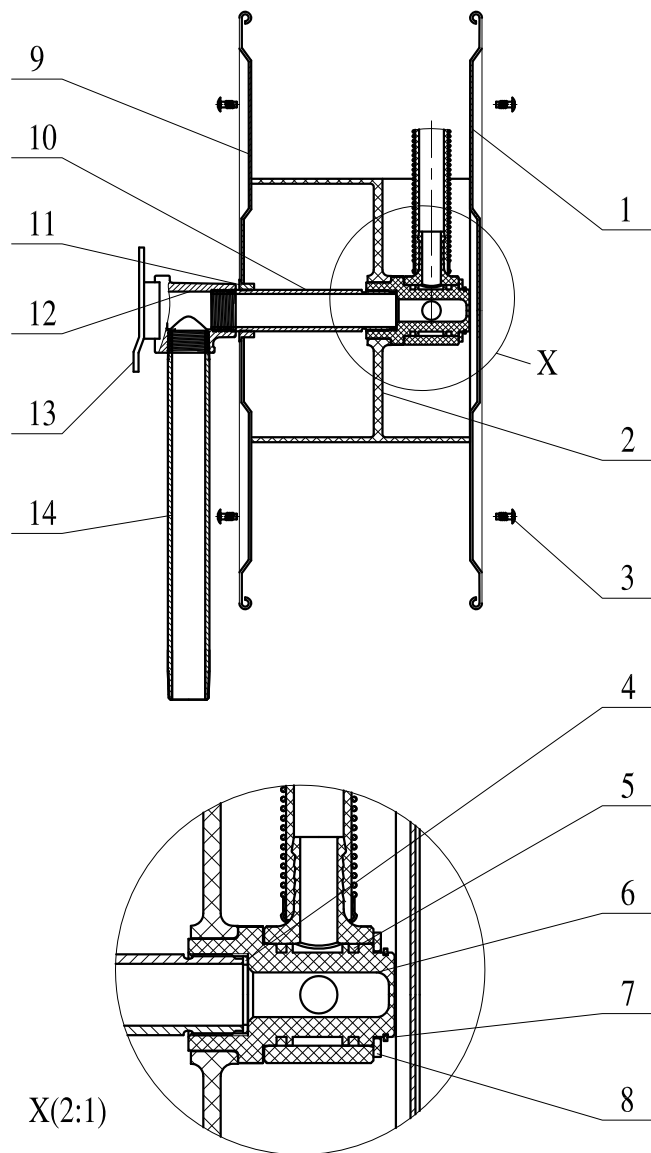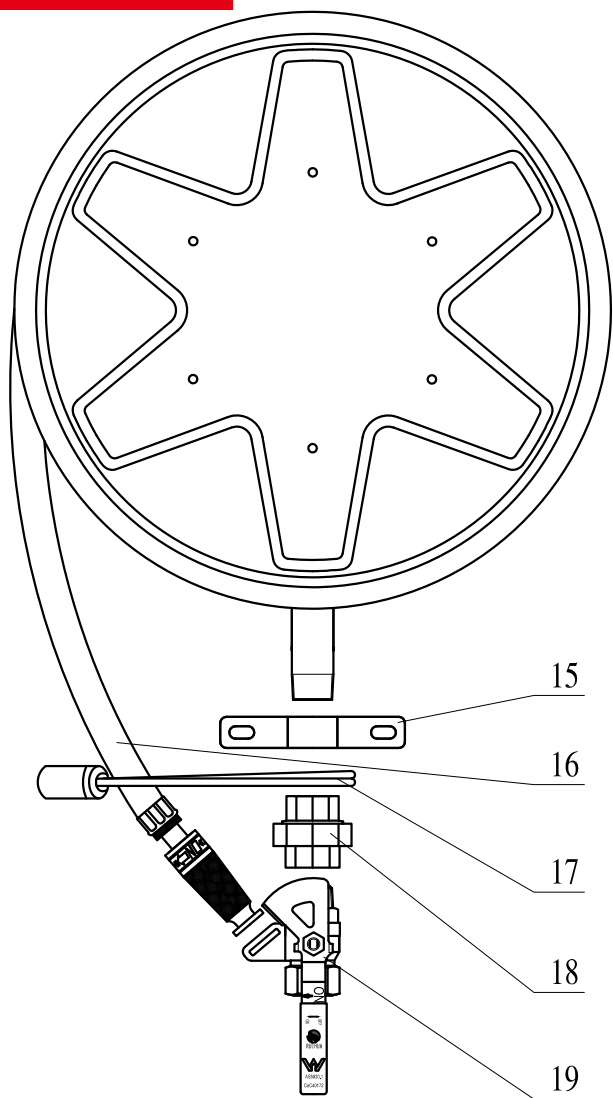

N0.	Part No.	Description	N0.	Part No.	Description
19	RH500105T	Ball Valve Assembly	5	RH301917-11	Gland Seal Quad Rings
18	/	Union	4	RH301917-12	Gland Seal Washer
17	RH301917-5	Hose Guide Assembly	3	RH301917-10	Screw
16	RH300447	Hose Assembly	2	RH301917-9	Drum
15	RH301914-7	Movable testle	1	RH301914-2	Side Plate Outer
14	RH301914-5	Pipe			
13	RH301914-4	Wall Bracket			
12	RH301914-3	Elbow			
11	RH301917-6	Bearing			
10	RH301914-6	Reel			
9	RH301914-1	Side Plate Inner			
8	RH301917-8	Retaining Washer			
7	GB/T894. 2-1986	Circlip			
6	RH301917-7	Gland Inner			

Distributed By: