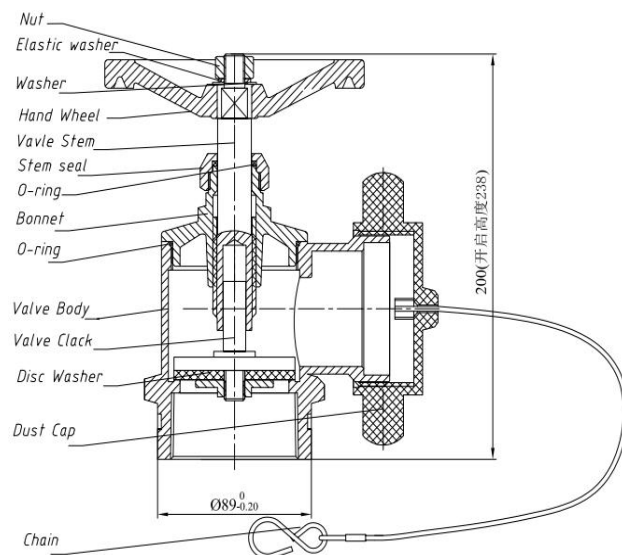


ISUPPLY

BRASS HYDRANT VALVES

Premium Quality. Supreme Strength & Corrosion Resistance

Complies with AS/NZS 2419.2

**Distributed by:**

Isupply(Australia)Pty Ltd.

Tel:+61 406 316 934

Email: info@isupplyaustralia.com.au

www.isupplyaustralia.com.au



Stock Code	Thread Type	Inlet Type	Weight
ISP-HVFBT-BR	65mm NSW Male	65mm Male BSP	4.25 kg
ISP-HVFBTRG-BR	65mm NSW Male	80mm Roll Grooved	4.25 kg
ISP-HVQRT-BR	65mm QRT Male	65mm Male BSP	4.27 kg
ISP-HVQRTRG-BR	65mm QRT Male	80mm Roll Grooved	4.27 kg
ISP-HVDCFA-BR	65mm CFA Male	80mm Roll Grooved	4.35 kg
ISP-HVBIRG-BR	65mm BI	80mm Roll Grooved	5.60 kg
Material - Body		Tin bronze Grade C83600	
- Bonnet		Tin bronze C83600	
- Stem		Brass Grade DR 48600	
- Hand Wheel		C Steel	
- O-ring		NBR Rubber	
- Seal (Disc Washer)		NBR Rubber	
- Dust Cap		U-V Stabilized Plastic	
Working Pressure		1,400 kPa	
Test Pressure		2700 kPa	
Working Temperature		-10°C ~ 85°C	
Standard Approval		AS 2419.2	
WaterMark Cert. No.		WMKA21674	