

TECHNICAL DATA SHEET

PAGE 1

CODE:	CPTL RANGE
DESCRIPTION:	SIDE LOAD POLY EXTINGUISHER CABINETS
CATEGORY:	CABINETS, COVERS, STANDS & TROLLEYS
REVISION DATE:	01 FEB 2021

SIDELOAD / TOPLOAD POLYPROPYLENE CABINETS FOR EXTREME ENVIRONMENTS



PRODUCT DESCRIPTION:


The CPTL Side Load range of cabinets are designed to meet the requirements of harsh environments. Injection moulded Polypropylene construction coupled with high quality nylon and polycarbonate fixtures provide high resistance to the effects of fuels, oils, UV rays as well as water and dust ingress achieving a IP59K rating.

Designed to be mounted either on vehicle chassis rails or under existing body components, the range includes three optional engineered mounting kits in hot-dipped galvanised finish.

TECHNICAL DATA SHEET

PAGE 2

IP59K RATED SIDE LOAD EXTINGUISHER CABINETS

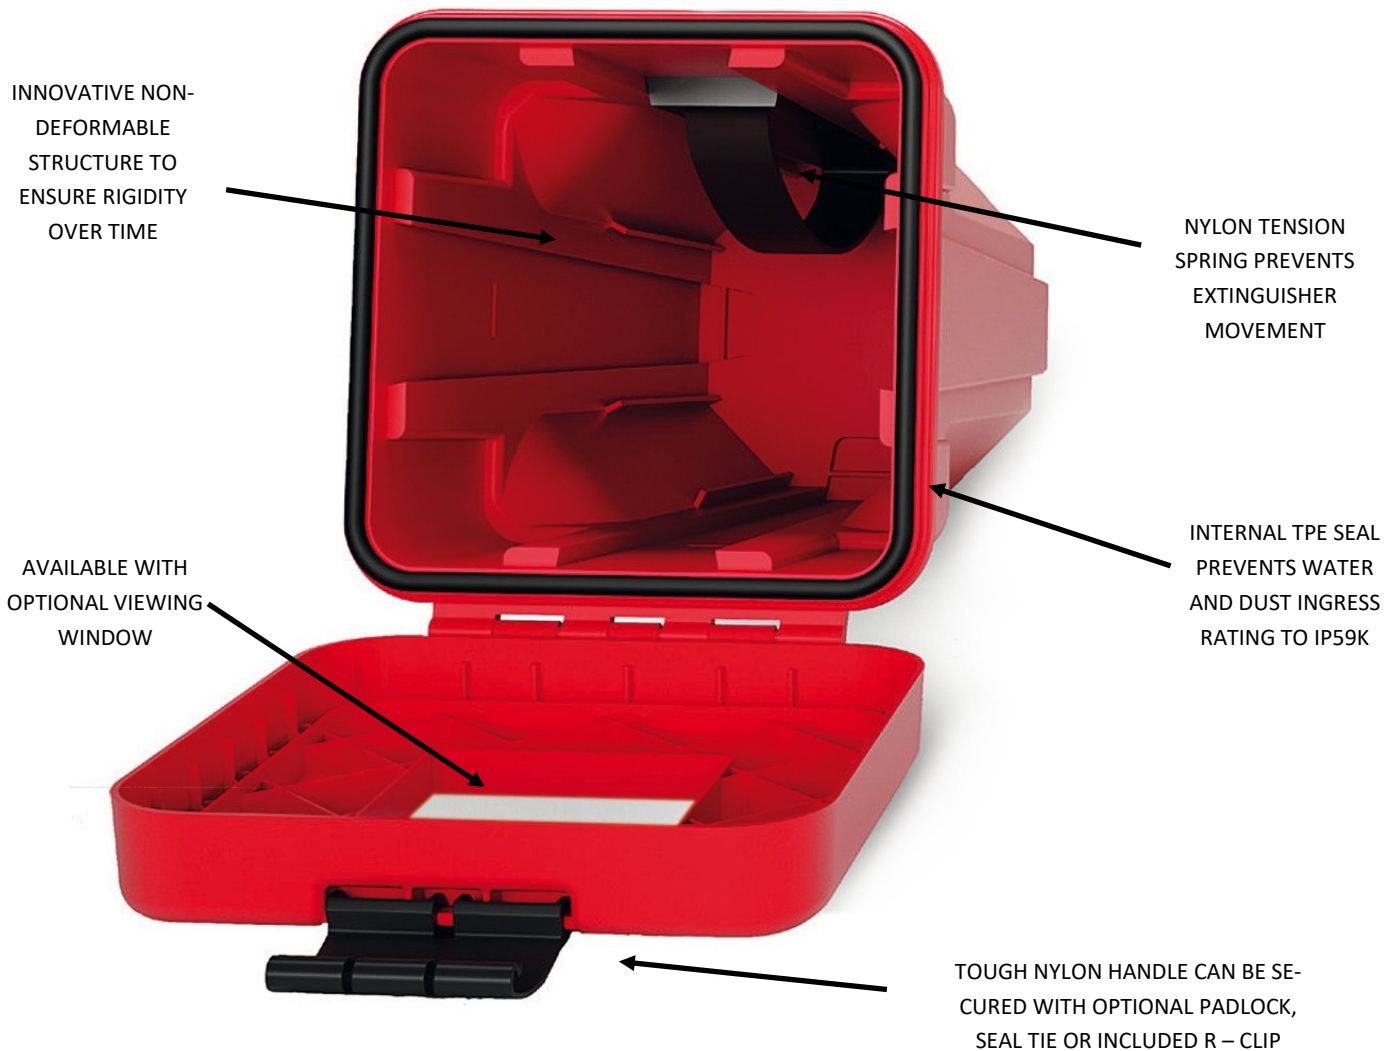

TÜV RHEINLAND Certification:

- Flammability (Flame Speed)
- Dust and water resistance (IP59K)
- Resistance to hydrocarbons and lubricating oils
- Accelerated weathering (UV rays)
- Compression (12.000 N)


TECHNICAL DATA SHEET

PAGE 3

IP59K RATED SIDE LOAD EXTINGUISHER CABINETS



** SEE NEXT PAGE FOR MOUNTING KIT OPTIONS

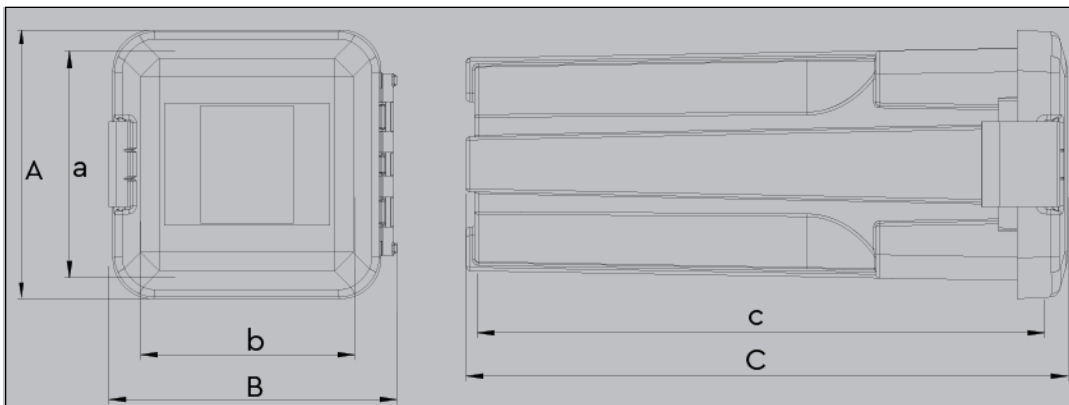


Code	Suits Extinguisher Size	A x B x C External (mm)	A x B x C Internal (mm)	Weight (Kg)	Extinguisher diameter (mm)	Colour	Inspection window
CPTL410	4.5KG	265x284x595	224x224x561	2.1	Ø 140/160	RED	✓
CPTL412	4.5KG	265x284x595	224x224x561	2.1	Ø 140/160	BLK	-
CPTL420	9.0KG	309x324x750	210x252x715	3.2	Ø 200	RED	✓
CPTL421	9.0KG	309x324x750	210x252x715	3.2	Ø 200	BLK	✓

IP59K RATED SIDE LOAD EXTINGUISHER CABINET MOUNTING SYSTEMS


VERTICAL MOUNTING KITS TO SUIT SIDE LOAD CABINET

CPTLB402 - HOT GALVANISED FINISH WITH GEOMET COATING AND FIXING KIT

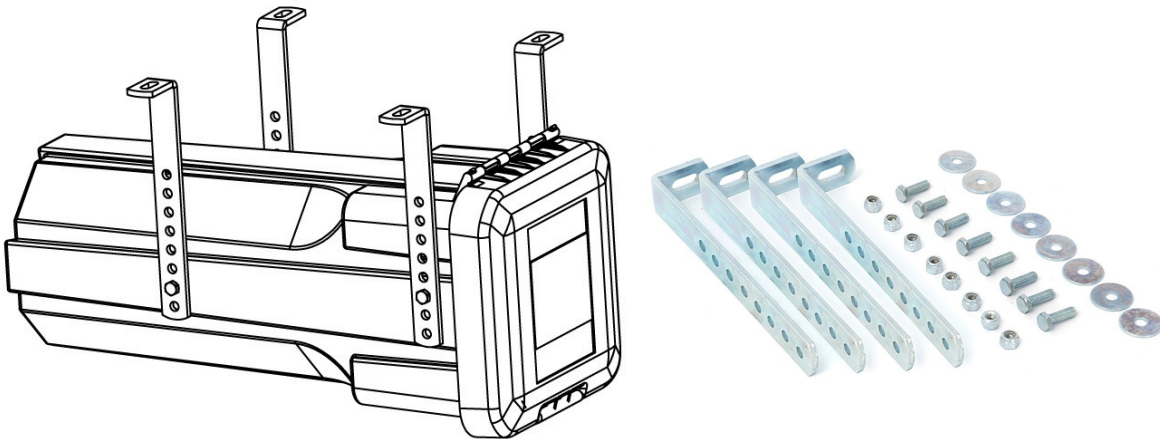

HORIZONTAL MOUNTING KITS TO SUIT SIDE LOAD CABINET

CPTLB512 - HOT GALVANISED FINISH WITH GEOMET COATING AND FIXING KIT

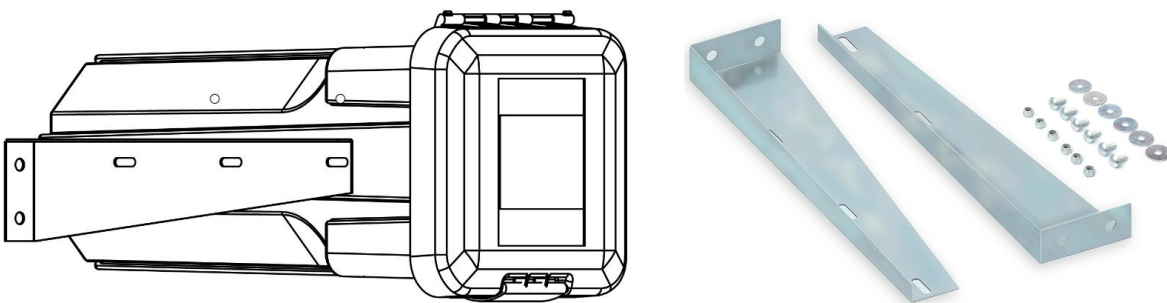

SPECIAL MOUNTING KITS TO SUIT SIDE LOAD CABINET

CPTLB532 - HOT GALVANISED FINISH WITH GEOMET COATING AND FIXING KIT

